
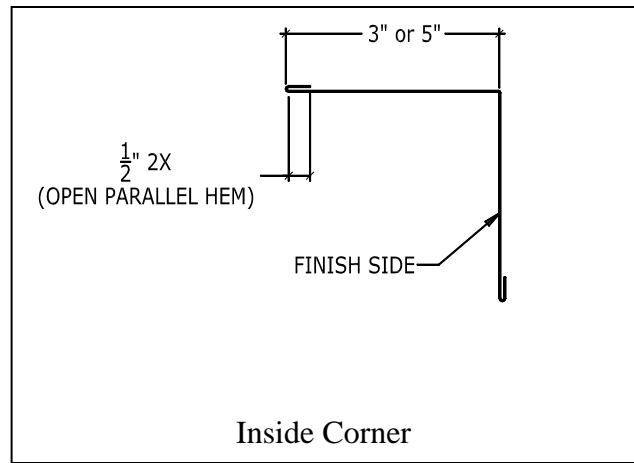


Corner Trim Specifications

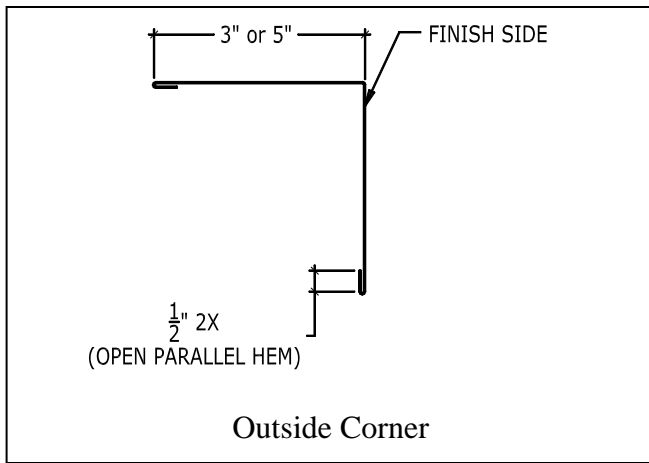

- Material: 26ga, 24ga, 22ga steel (match RoofScreen panels)
- Dimensions: 3" x 3" or 5" x 5", with $\frac{1}{2}$ " hems on both legs
- Length: 10' sections
- Attachment: Exposed fasteners, color matched to panel
- Finish: Factory applied Kynar or Siliconized Polyester paint
- Colors: Match RoofScreen panels
- Warranty: 20 years plus. Varies with color and type of paint finish

Installation: After the RoofScreen panels are installed, simply hold the corner trim in place, and fasten into the panels with color matched self drilling screws at 12" O.C., each side. Using the 3" vs. 5" trim is a personal preference. However, the 5" trim is more forgiving, as it will cover more of a gap where the panels meet in the corner.